


REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△1	Drawing arrangement	KSH/20160819	JJS/20160819	KTJ/20160819
△2	Drawing arrangement	KSH/20161124	JJS/20161124	KTJ/20161124
△3	Drawing title block updated	KCH/20190806	JJS/20190806	KTJ/20190806

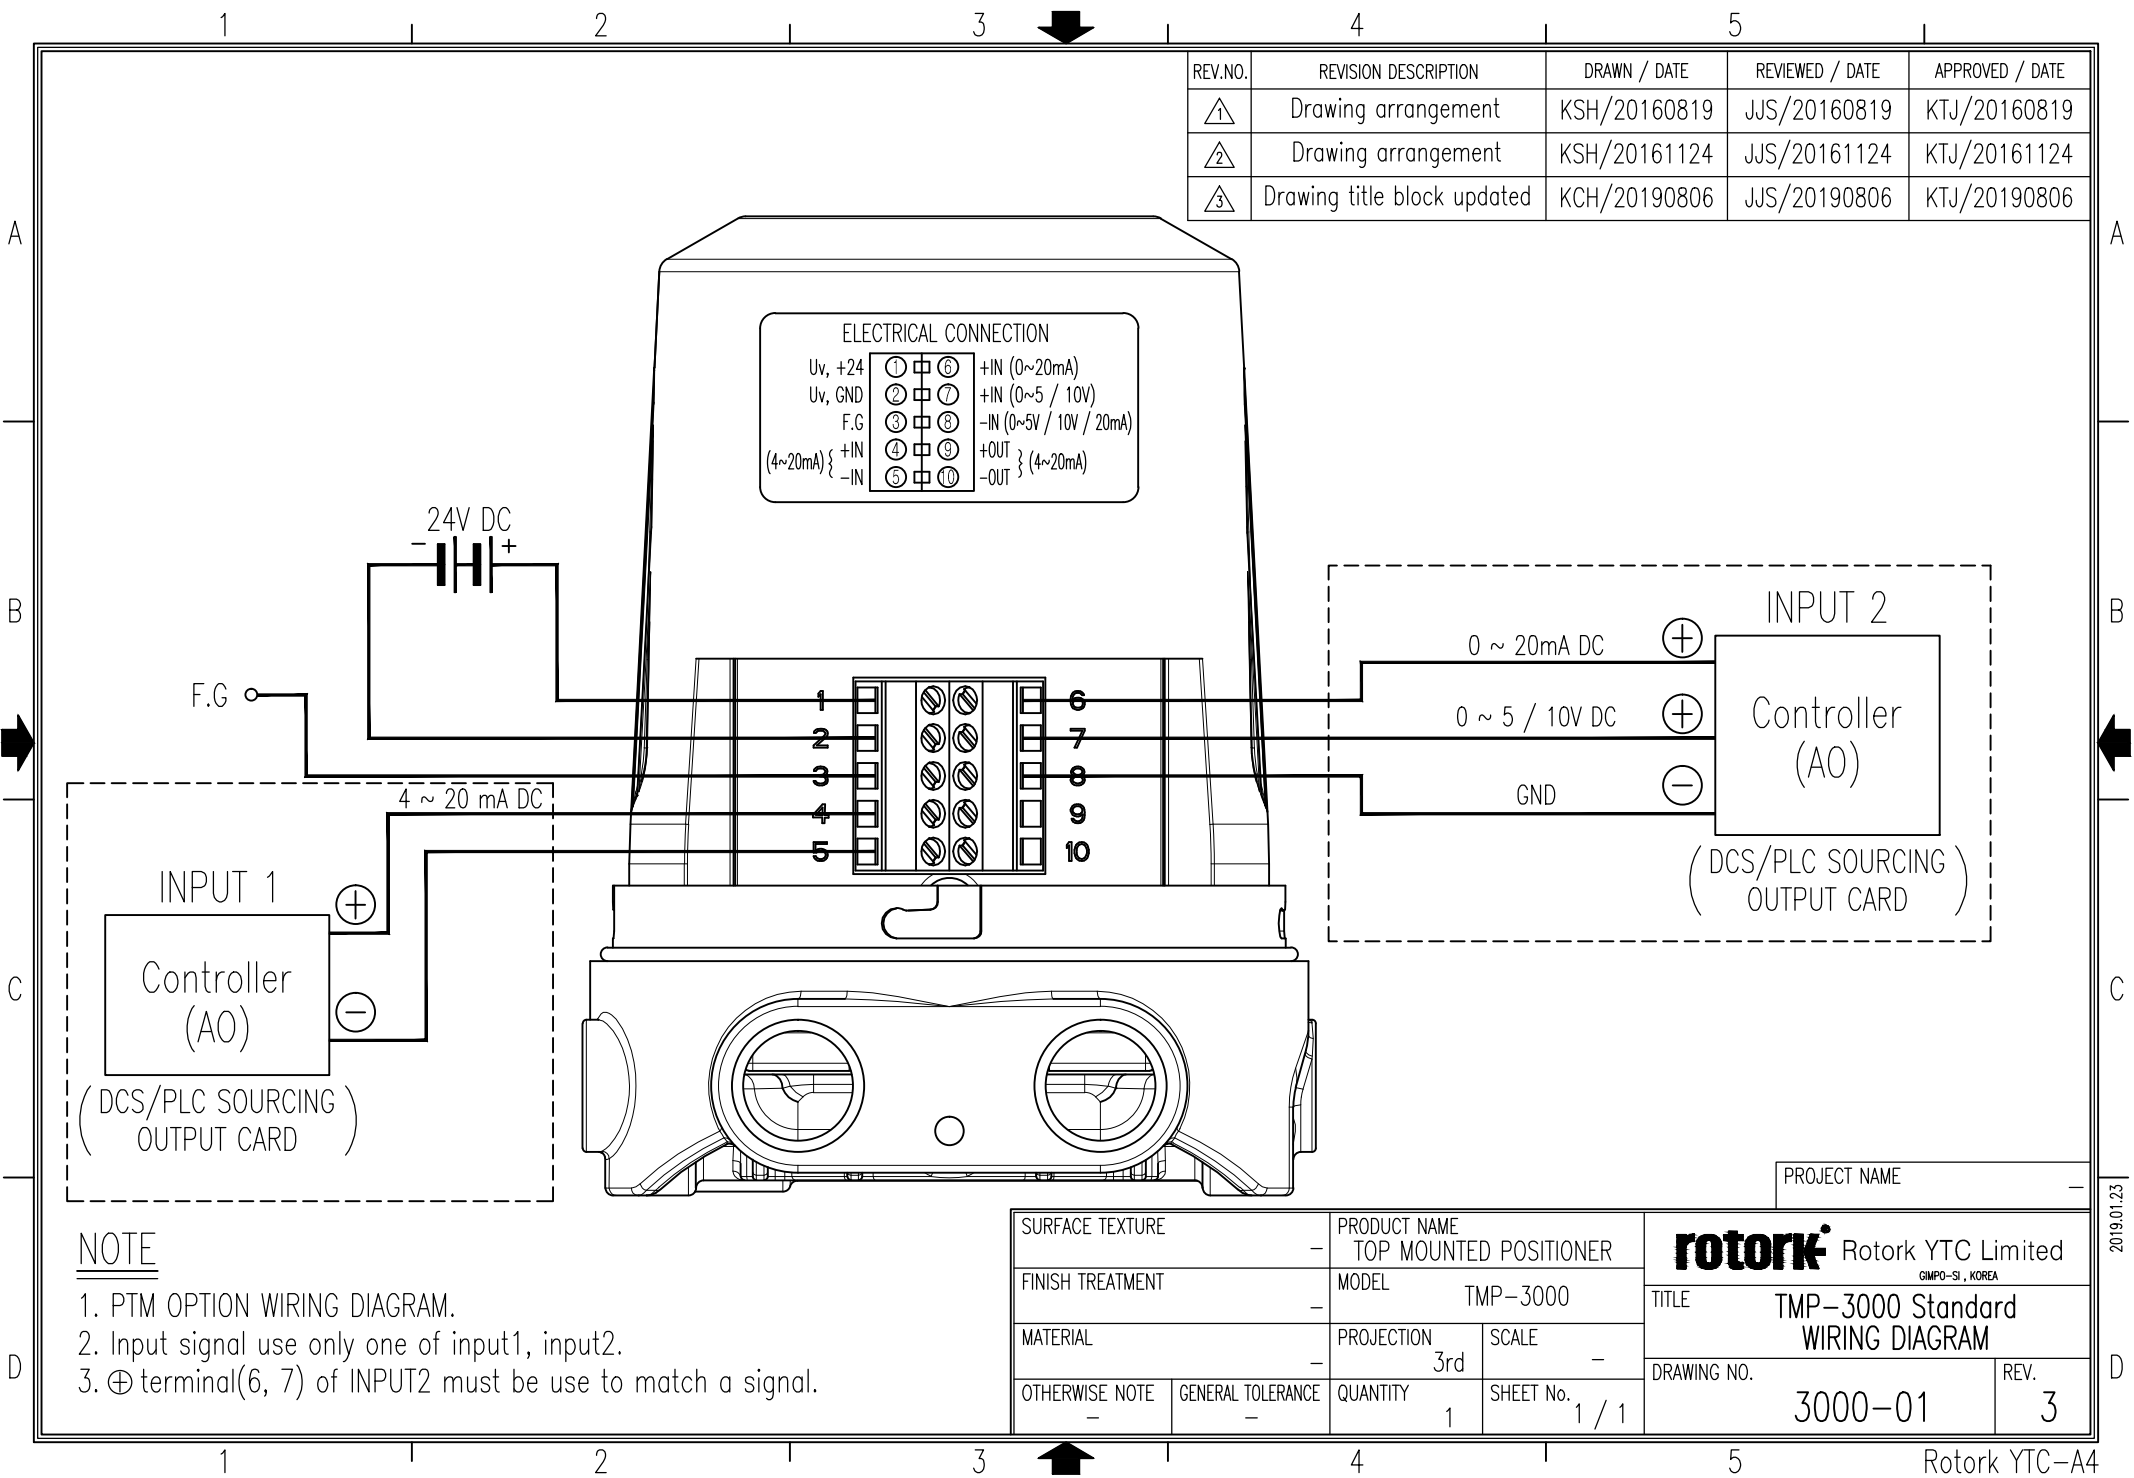

ELECTRICAL CONNECTION

Uv, +24	①	⑥	+IN (0~20mA)
Uv, GND	②	⑦	+IN (0~5 / 10V)
F.G	③	⑧	-IN (0~5V / 10V / 20mA)
(4~20mA) {	+IN	④	+OUT (4~20mA)
	-IN	⑤	-OUT (4~20mA)

**NOTE**

1. PTM OPTION WIRING DIAGRAM.
2. Input signal use only one of input1, input2.
3. ⊕ terminal(6, 7) of INPUT2 must be use to match a signal.

SURFACE TEXTURE		PRODUCT NAME		Rotork YTC Limited <small>GMPO-SI, KOREA</small>	
-		TOP MOUNTED POSITIONER			
FINISH TREATMENT		MODEL		TITLE	
-		TMP-3000		TMP-3000 Standard WIRING DIAGRAM	
MATERIAL		PROJECTION	SCALE	DRAWING NO.	
-		3rd	-	3000-01	
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.	REV.	
-	-	1	1 / 1	3	

PROJECT NAME \_\_\_\_\_