


REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△4	Drawing title block updated	KCH/20190805	JJS/20190805	KTJ/20190805
△5	Remote terminal changed	KCH/20190905	JJS/20190905	KTJ/20190905
△6	PTM line modified	KCH/20191206	JJS/20191206	KTJ/20191206

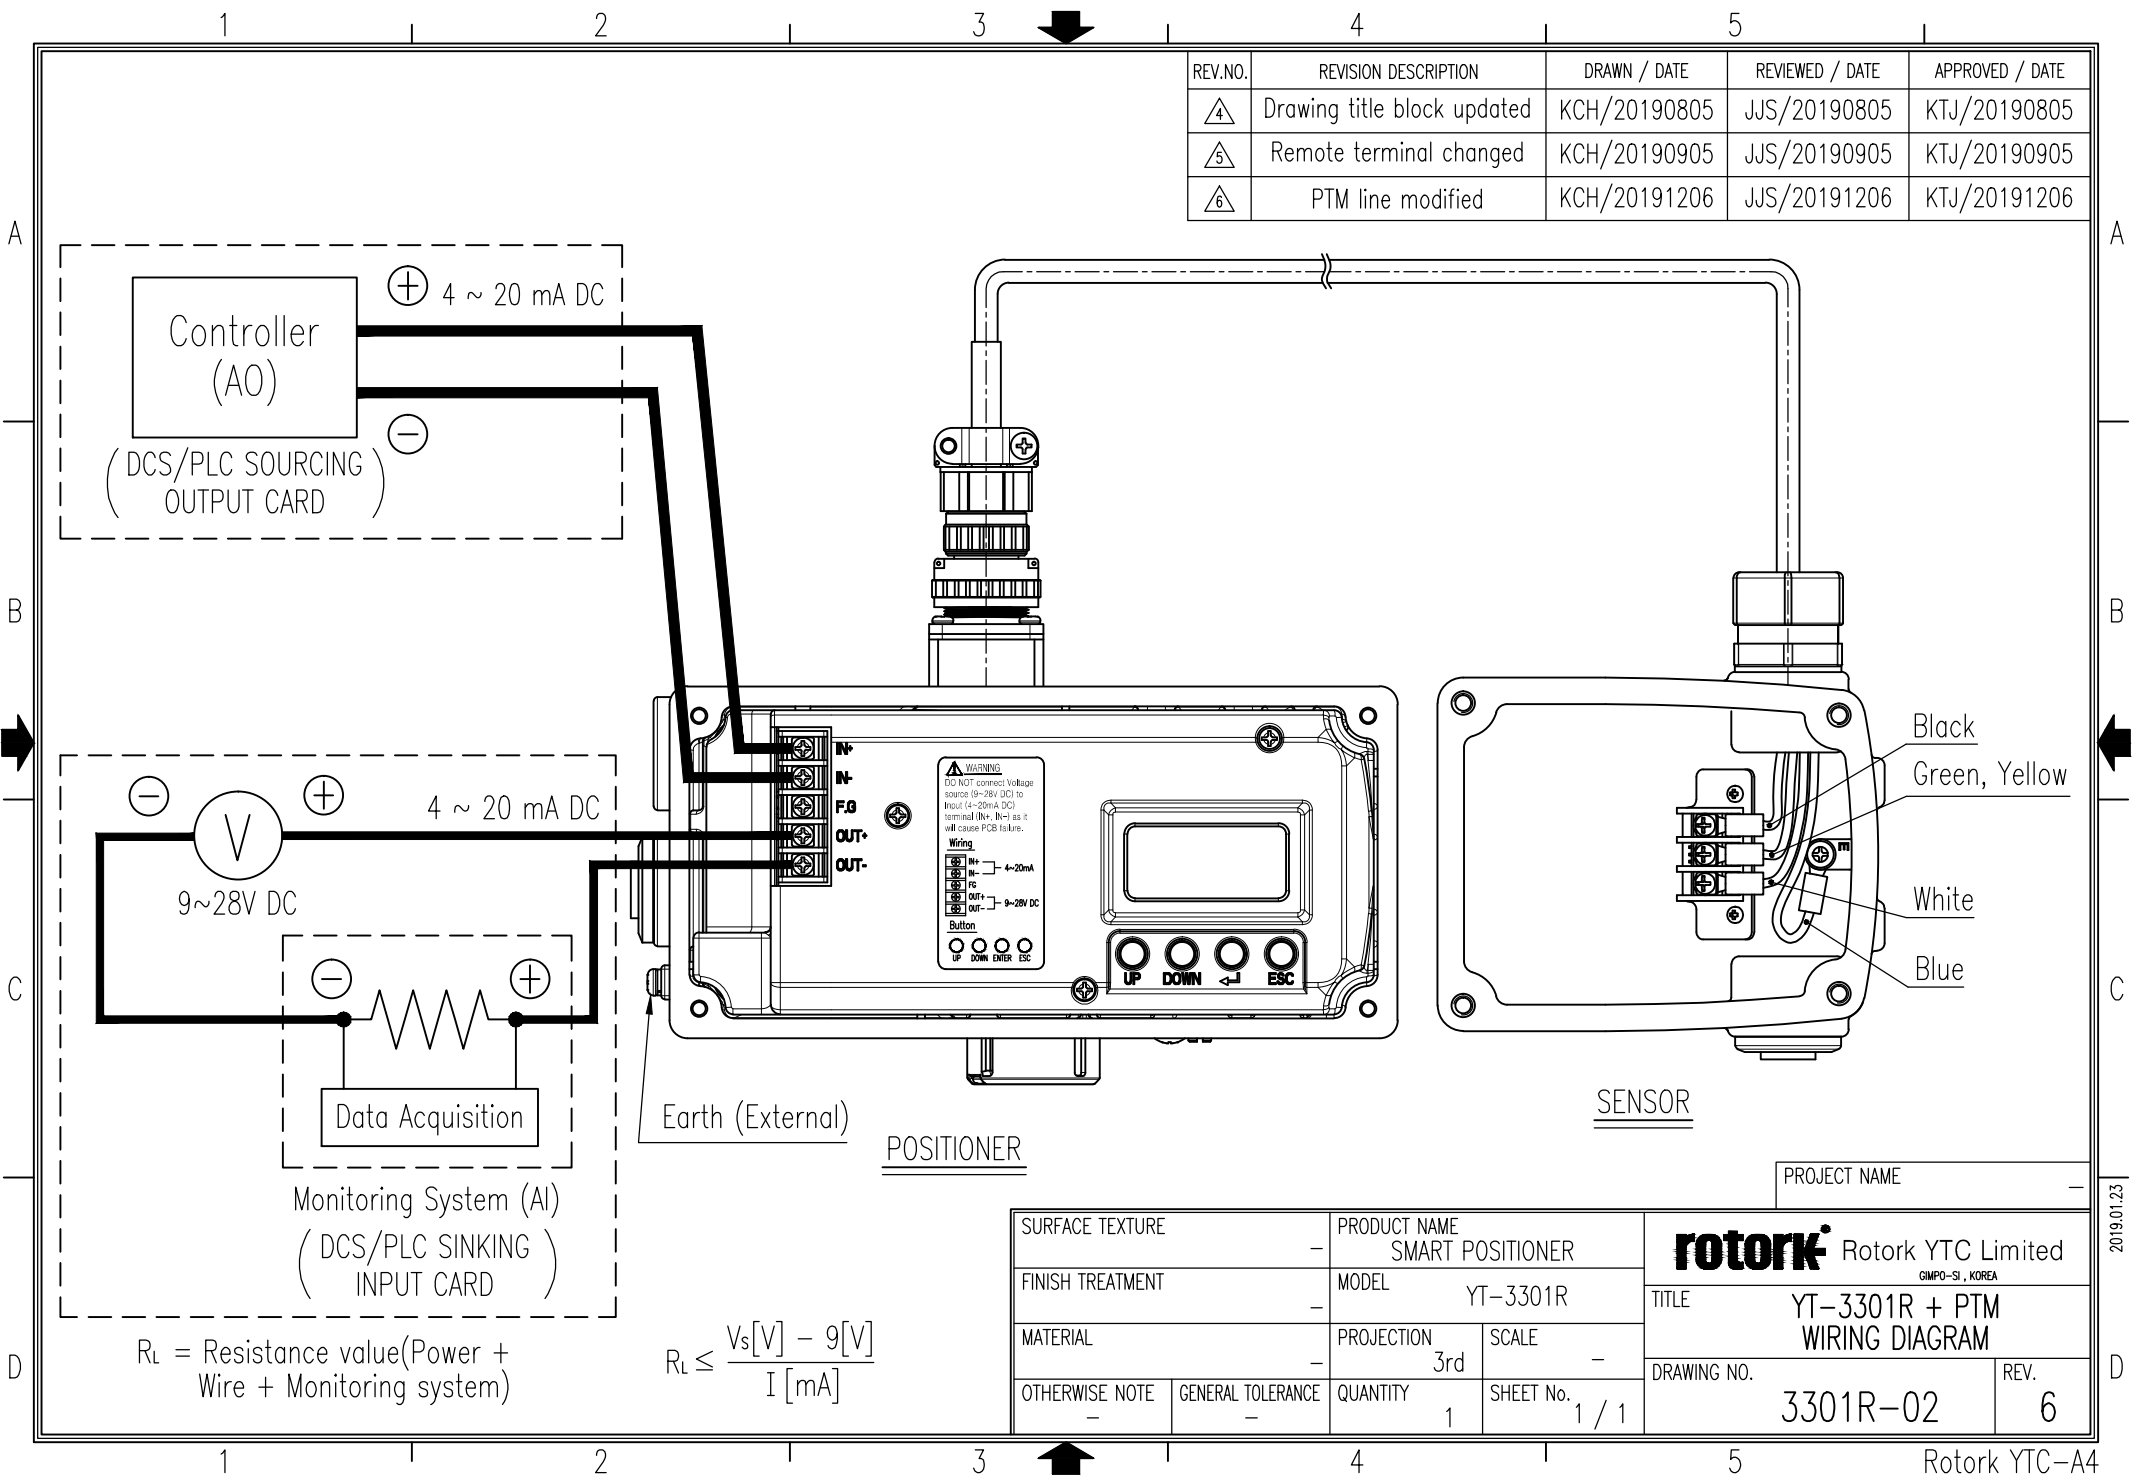

WARNING
 DO NOT connect Voltage source (9~28V DC) to Inout (4~20mA DC) terminal. Over-Input as it will cause PCB failure.

Wiring

IN+	+	4~20mA
IN-	-	4~20mA
OUT+	+	9~28V DC
OUT-	-	9~28V DC

Button

UP	DOWN	ENTER	ESC
----	------	-------	-----

PROJECT NAME _____

SURFACE TEXTURE		PRODUCT NAME	
-		SMART POSITIONER	
FINISH TREATMENT		MODEL	
-		YT-3301R	
MATERIAL		PROJECTION	SCALE
-		3rd	-
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.
-	-	1	1 / 1

Rotok YTC Limited <small>GMPO-SI, KOREA</small>	
TITLE	
YT-3301R + PTM WIRING DIAGRAM	
DRAWING NO.	REV.
3301R-02	6

$R_L = \text{Resistance value(Power + Wire + Monitoring system)}$

$$R_L \leq \frac{V_s[V] - 9[V]}{I [mA]}$$

2019.01.23