



REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	First Issued	OSS/20150413	JCS/20150413	LYH/20150413
⚠	DRAWING ARRANGEMENT	KSH/20160819	JJS/20160819	KTJ/20160819

ELECTRICAL CONNECTION			
Uv, +24	①	⑥	+IN (0~20mA)
Uv, GND	②	⑦	+IN (0~5 / 10V)
F.G	③	⑧	-IN (0~5V / 10V / 20mA)
(4~20mA)	④	⑨	+OUT } (4~20mA)
	⑤	⑩	-OUT }

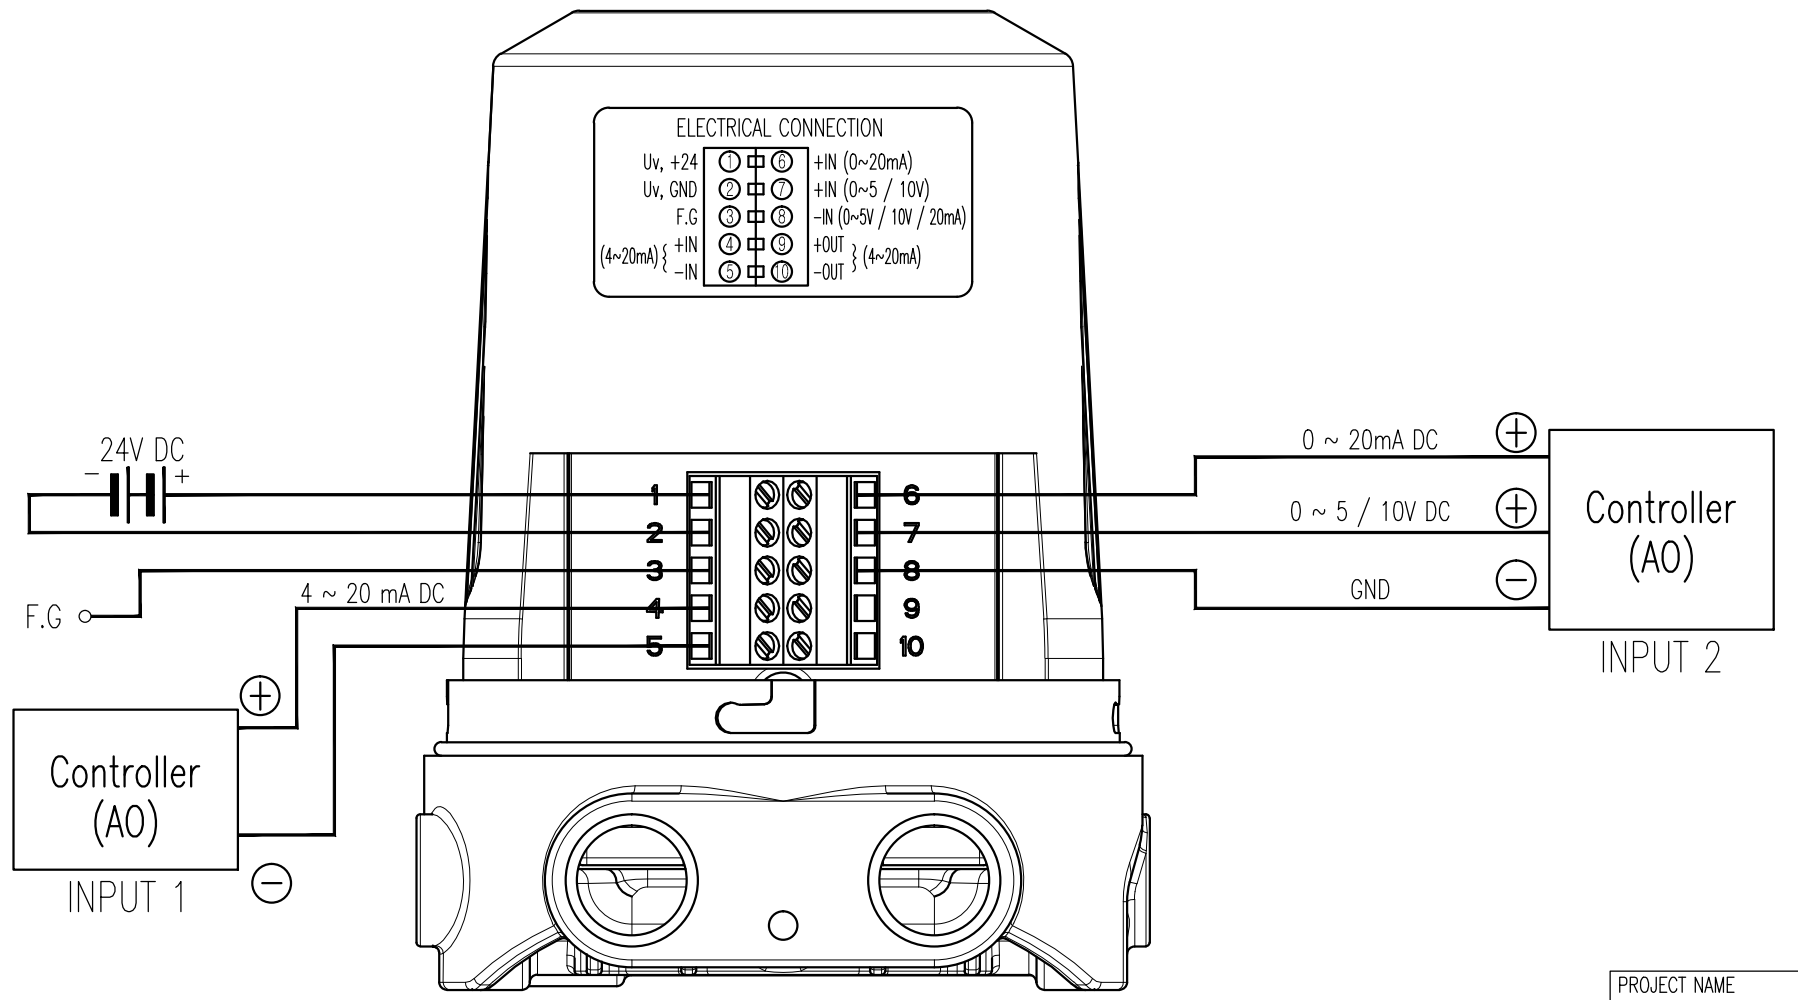

NOTE

1. PTM OPTION WIRING DIAGRAM.
2. Input signal use only one of input1, input2.
3. ⊕ terminal(6, 7) of INPUT2 must be use to match a signal.

SURFACE TEXTURE		PRODUCT NAME TOP MOUNTED POSITIONER		 YOUNG TECH CO., LTD. <small>GIMPO-SI, KOREA</small>	
FINISH TREATMENT		MODEL TMP-3000			
MATERIAL		PROJECTION	SCALE	TMP-3000 STANDARD WIRING DIAGRAM	
OTHERWISE NOTE		GENERAL TOLERANCE	QUANTITY		

2016.07.12